


OŚWIETLENIE ULICZNE - STAL

SŁUPY OŚWIETLENIOWE ULICZNE PROSTE ZBIEŻNE OKRĄGŁE t=4mm

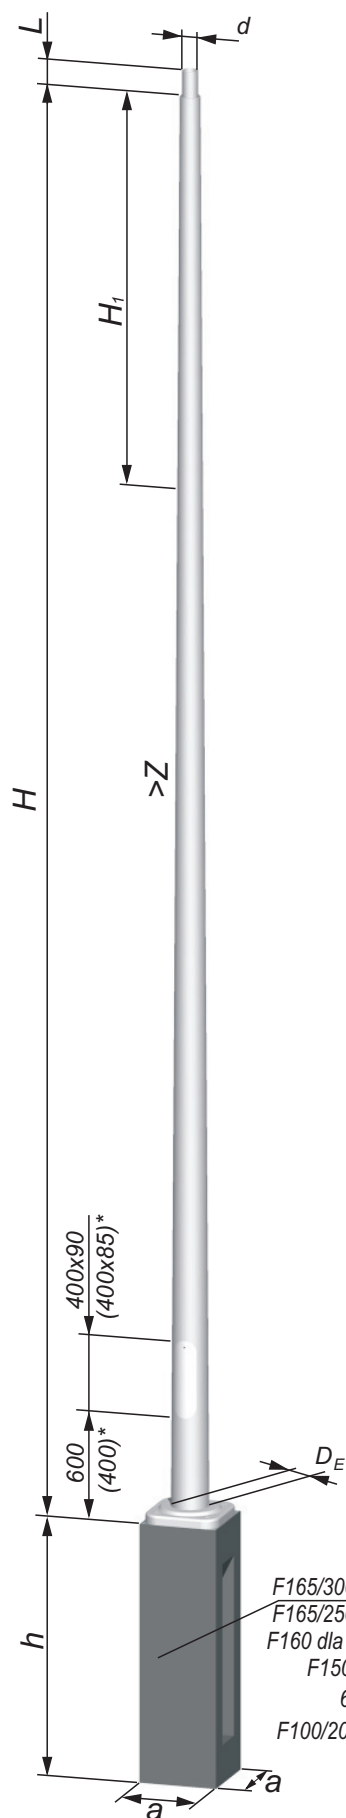

Dane techniczne

TYP	t	H	H ₁	d/D _E	Z	L	m	a x a x h TYP
	mm	m	mm	mm	mm/m	mm	kg	m
S-40PC-4/ 70	4,0	4,0		60; 70/121			45	0,3 x 0,3 x 1,0
S-50PC-4/ 70	5,0	5,0		60; 70/136			58	F100/200
S-60PC-4/ 70	6,0	6,0		60; 70/148,5			72	
S-70PC-4/ 70	7,0	7,0		60; 70/161			86	0,3 x 0,3 x 1,5
S-80PC-4/ 70	8,0	8,0		60; 70/173,5			102	F150/200
S-90PC-4/ 70	9,0	9,0		60; 70/186			120	
S-100PC-4/ 70	10,0	10,0		60; 70/198,5	12,5	100	138	
S-110PC-4/ 70	11,0	11,0		60; 70/210			172	0,4 x 0,4 x 1,6
S-120PC-4/ 70	12,0	12,0		60; 70/222,5			191	F160/200
S-130PC-4/ 70	13,0	13,0		60; 70/223,5			206	0,45 x 0,45 x 1,65
S-140PC-4/ 70	14,0	14,0		60; 70/236			234	F165/250

Dane wytrzymałościowe

TYP	Masa opraw	Strefa wiatrowa wg PN EN 1991-1-4				M _F
		Dopuszczalna powierzchnia opraw [m ²]				
		I	I	II	III	
	kg	≤300m n.p.m.	≤500m n.p.m.	≤300m n.p.m.	≤950m n.p.m.	kNm
S-40PC-4/ 70	60	1,773	1,339	1,227	0,891	5,6
S-50PC-4/ 70	60	1,817	1,365	1,250	0,903	8,1
S-60PC-4/ 70	60	1,734	1,295	1,183	0,849	10,3
S-70PC-4/ 70	60	1,594	1,179	1,076	0,768	12,3
S-80PC-4/ 70	60	1,537	1,132	1,032	0,733	14,8
S-90PC-4/ 70	60	1,500	1,103	1,003	0,711	17,6
S-100PC-4/ 70	60	1,220	0,879	0,792	0,549	18,0
S-110PC-4/ 70	60	1,423	1,039	0,943	0,663	23,4
S-120PC-4/ 70	60	1,405	1,024	0,929	0,647	26,7
S-130PC-4/ 70	60	1,032	0,730	0,655	0,437	27,0
S-140PC-4/ 70	60	1,037	0,732	0,656	0,431	28,9

* - wymiary dotyczą słupa H≤6m

Elektromontaż Rzeszów S.A.

www.elektromontaz.com.pl